



Datasheet of MGM3636E-52Q

Version 1.0

2024/12/19

LOCOSYS Technology Inc.

20F.-13, No.79, Sec. 1, Xintai 5th Rd.,

Xizhi District, New Taipei City 221, Taiwan

☎ 886-2-8698-3698

📠 886-2-8698-3699

🌐 www.locosystech.com

Contents

1. Introduction	3
2. Features.....	4
3. Applications.....	4
4. Functional Description	5
4.1 Key Features.....	5
5. Pin Assignment and Definition.....	6
6. Mechanical Dimensions	7
7. DC & Temperature characteristics	8
7.1 DC Electrical characteristics.....	8
7.2 Temperature characteristics.....	8
8. Software Interface.....	9
8.1 NMEA output message	9
9. Document change list	15

Table Index

Table 1: Key Features	5
Table 2: Pin Definition	6
Table 3: NMEA output message.....	9
Table 4: GGA Data Format.....	9
Table 5: Position Fix Indicators.....	10
Table 6: GLL Data Format	10
Table 7: GSA Data Format	11
Table 8: Mode 1.....	11
Table 9: Mode 2.....	11
Table 10: GNSS system ID.....	11
Table 11: GSV Data Format	12
Table 12: RMC Data Format	13
Table 13: VTG Data Format.....	13
Table 14: GST Data Format	14

Figure Index

Figure 1: Pin Assignment	6
Figure 2: Specification size chart	7
Figure 3: Wire size chart.....	7



1. Introduction

MGM3636E-52Q product is high-performance L1-band GNSS receiver (also known as GNSS mouse) that are capable of tracking all global civil navigation systems (GPS, GLONASS, BDS, GALILEO, QZSS). The GNSS mouse will acquire L1 signals at a time while providing the better position accuracy. It can provide user with fast Time-To-First-Fix, superior sensitivity and low power consumption. Its far-reaching capability meets the sensitivity requirements of car navigation as well as other location-based applications.

Its superior cold-start sensitivity allows it to acquire, track, and get position fix autonomously in difficult weak signal environment. Its superior tracking sensitivity allows continuous position coverage in nearly all outdoor application environments.

The module supports hybrid ephemeris prediction to achieve faster cold start. One is self-generated ephemeris prediction (called EASY) that is no need of both network assistance and host CPU's intervention. This is valid for up to 3 days and updates automatically from time to time when GNSS module is powered on and satellites are available. The other is server-generated ephemeris prediction (called EPO) that gets from an internet server. This is valid for up to 14 days. Both ephemeris predictions are stored in the on-board flash memory and perform a cold start time less than 15 seconds.

The faster GNSS fixes make it possible to use accurate positioning and navigation services anytime and anywhere with a smaller power budget than previously possible. Available in a cost-optimized version as well as a low-power version which supports for the Adaptive Low Power (ALP) feature in fitness and normal navigation modes.

2. Features

- Build on high performance, low-power chip set
- Ultra high track sensitivity: -165dBm
- Concurrent reception of single-band and multi-system satellite signals
- Supports BDS-3 signal
- Extremely fast TTFF at low signal level
- Multipath detection and suppression
- Low power consumption: 18mA@3.3V
- NMEA-0183 compliant protocol
- Operating voltage: 3.0V to 5.5V
- Communication type: UART
- Waterproof
- RoHS compliant (Lead-free)

3. Applications

- LBS (Location Based Service)
- PND (Portable Navigation Device)
- Vehicle navigation system

4. Functional Description

4.1 Key Features

Table 1: Key Features

Parameter	Specification
GNSS engine	GNSS engine has 47SVs channels and DSP accelerators
GNSS reception	- GPS/QZSS : L1 C/A, L1C - GLONASS : L1 - GALILEO : E1 - BEIDOU : B1I, B1C - SBAS : WAAS, EGNOS, MSAS, GAGAN
Update rate	GNSS : 1Hz default , up to 10Hz (option)⁽¹⁾
Position accuracy ⁽²⁾	- GNSS : < 1.5m CEP - SBAS : < 1.5m CEP
Velocity & Time accuracy	- GNSS : < 0.1m/s CEP 1PPS : ±10 ns
Time to First Fix (TTFF) ⁽³⁾	- Hot start : < 2 sec - Cold start : < 28 secs
Sensitivity	- Cold start : -149dBm - Hot start : -155dBm - Reacquisition : -158dBm - Tracking & navigation : -165dBm
GNSS Operating limit	- Velocity : < 500 m/s - Altitude : < 10,000 m⁽⁴⁾
Datum	Default WGS-84, User definable
UART Port	- UART Port: TXD and RXD - Supports baud rate from 9600 bps to 961200 bps 115200bps by default - NMEA 0183 Protocol Ver.4.10, GNSS Receiver Protocol 1Hz: GGA, GLL, GSA, GSV, RMC, VTG, GST
Physical Characteristics	- Size : 36.3±0.50 × 36.4±0.50 × 13.5±0.5mm - Wire specifications: 2.5mm 4Pin DC,L=600±50mm - Weight : Approx. 33.4 g

Note (1): If you want to use 2/4/5/10Hz, please contact us.

Note (2): CEP, 50%, 24 hours static, open sky, > 6 SVs for each GNSS system.

Note (3): Commanded starts. All satellites signals at -130 dBm. Measured at room temperature.

Note (4): The maximum altitude of the balloon mode is 80,000 m. If you need, please contact us.

5. Pin Assignment and Definition

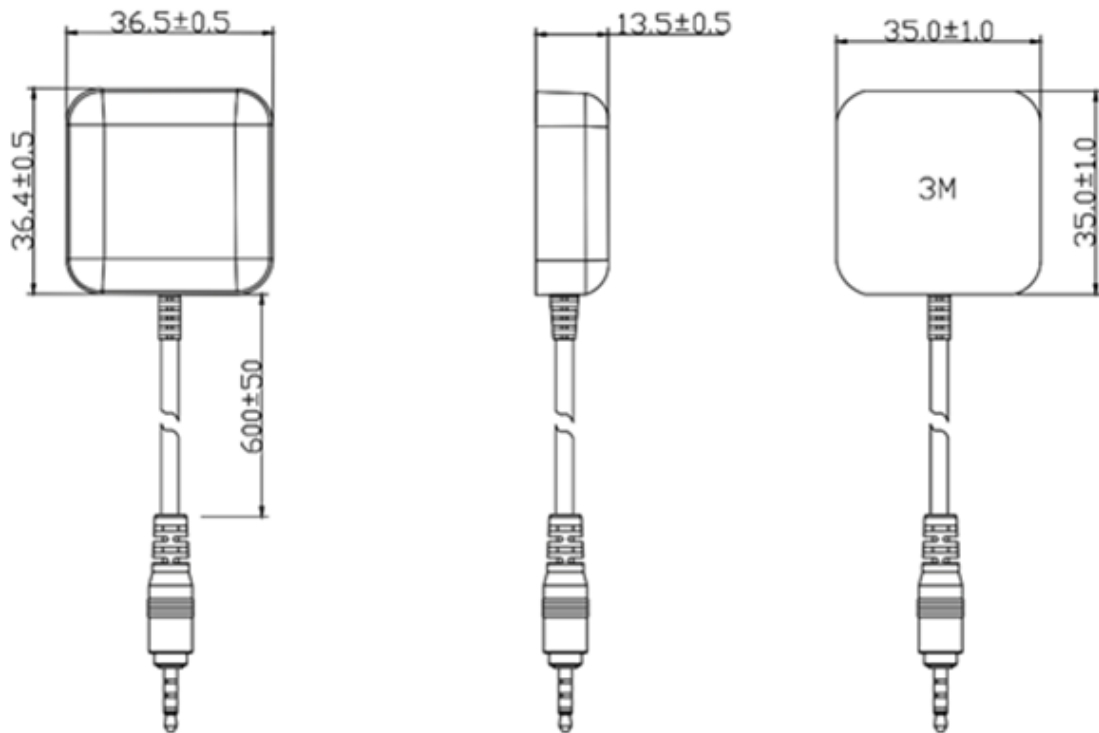


Figure 1: Pin Assignment

Table 2: Pin Definition


Pin No.	Name	I/O	Description	Remark
1	VCC	I	Power Supply	Voltage range: 3.0V~5.5V
2	TXD	O	UART Serial Data output	
3	GND	G	Ground	
4	RXD	I	UART Serial Data input	

6. Mechanical Dimensions



Size Unit (mm)

Figure 2: Specification size chart

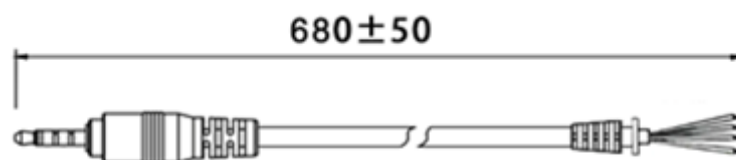

Size Unit (mm)

Figure 3: Wire size chart

7. DC & Temperature characteristics

7.1 DC Electrical characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Input Voltage	VCC	3.0	3.3	5.5	V
Input current	Icc		18		mA

Note 1: The VCC Pin need a stable DC voltage supply.

7.2 Temperature characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Temperature	Topr	-25	-	60	°C
Storage Temperature	Tstg	-25	-	60	°C

8. Software Interface

8.1 NMEA output message

Table 3: NMEA output message

NMEA record	Description
GGA	Global positioning system fixed data
GLL	Geographic position - latitude/longitude
GSA	GNSS DOP and active satellites
GSV	GNSS satellites in view
RMC	Recommended minimum specific GNSS data
VTG	Course over ground and ground speed
GST	Estimated error in position solution

- GGA--- Global Positioning System Fixed Data

Contains the values for the following example

\$GNGGA,061300.000,2503.71255,N,12138.74493,E,2,38,0.44,121.12,M,15.32,M,,*7E

Table 4: GGA Data Format

Name	Example	Units	Description
Message ID	\$GNGGA		GGA protocol header
UTC Time	061300.000		hhmmss.sss
Latitude	2503.71255		ddmm.mmmmm
N/S indicator	N		N=north or S=south
Longitude	12138.74493		dddmm.mmmmm
E/W Indicator	E		E=east or W=west
Position Fix Indicator	2		See Table 5
Satellites Used	38		Number of satellites in view
HDOP	0.44		Horizontal Dilution of Precision (meters)
MSL Altitude	121.12	meters	Antenna Altitude above/below mean-sea-level (geoid) (in meters)
Units	M	meters	Units of antenna altitude, meters
Geoidal Separation	15.32	meters	
Units	M	meters	Units of geoidal separation, meters
Age of diff. GNSS data		second	Null fields when DGPS is not used
Diff. Ref. Station ID			Differential reference station ID, 0000-1023
Checksum	*7E		Checksum
<CR> <LF>			End of message termination

Table 5: Position Fix Indicators

Value	Description
0	No position fix
1	Autonomous GNSS fix
2	Differential GNSS fix
6	Estimated/Dead reckoning fix

● GLL--- Geographic Position – Latitude/Longitude

Contains the values for the following example:

\$GNGLL,2503.71255,N,12138.74493,E,061300.000,A,D*42

Table 6: GLL Data Format

Name	Example	Units	Description
Message ID	\$GNGLL		GLL protocol header
Latitude	2503.71255		ddmm.mmmmm
N/S indicator	N		N=north or S=south
Longitude	12138.7493		dddmm.mmmmm
E/W indicator	E		E=east or W=west
UTC Time	061300.000		hhmmss.sss
Status	A		A=data valid or V=data not valid
Mode	D		N = No position fix A = Autonomous GNSS fix D = Differential GNSS fix E = Estimated/Dead reckoning fix
Checksum	*42		
<CR> <LF>			End of message termination

● GSA---GNSS DOP and Active Satellites

Contains the values for the following example:

\$GNGSA,A,3,19,195,17,06,20,11,09,02,194,12,05,04,0.81,0.44,0.68,1*04

\$GNGSA,A,3,14,,,,,,,,,0.81,0.44,0.68,1*03

\$GNGSA,A,3,66,81,88,65,79,82,,,,,,,,,0.81,0.44,0.68,2*0B

\$GNGSA,A,3,03,15,34,27,30,,,,,,,,,0.81,0.44,0.68,3*02

\$GNGSA,A,3,33,40,07,10,38,28,08,41,13,14,43,42,0.81,0.44,0.68,4*0B

\$GNGSA,A,3,11,39,,,,,,,,,0.81,0.44,0.68,4*09

Table 7: GSA Data Format

Name	Example	Units	Description
Message ID	\$GNGSA		GSA protocol header
Mode 1	A		See Table 8
Mode 2	3		See Table 9
ID of satellite used	19		SV on Channel 1
ID of satellite used	195		SV on Channel 2
ID of satellite used			SV on Channel 12
PDOP	0.81		Position Dilution of Precision
HDOP	0.44		Horizontal Dilution of Precision
VDOP	0.68		Vertical Dilution of Precision
GNSS system ID	1		See Table 10
Checksum	*04		
<CR> <LF>			End of message termination

Table 8: Mode 1

Value	Description
M	Manually set to operate in 2D or 3D mode
A	Automatically switching between 2D or 3D mode

Table 9: Mode 2

Value	Description
1	No position fix
2	2D fix
3	3D fix

Table 10: GNSS system ID

Value	Description
1	GPS
2	GLONASS
3	GALILEO
4	BEIDOU
6	IRNSS

- GSV---GNSS Satellites in View

Contains the values for the following example:

\$GPGSV,4,1,15,196,73,108,46,19,72,077,47,195,71,061,47,199,59,164,22,1*5B

\$GPGSV,4,2,15,17,54,115,47,06,49,003,48,20,44,248,47,11,36,306,46,1*6E

\$GPGSV,4,3,15,09,35,079,45,02,31,307,45,194,28,175,43,12,25,302,43,1*52

\$GPGSV,4,4,15,05,14,230,38,04,14,051,38,14,11,173,43,1*53

\$GLGSV,2,1,07,66,71,107,44,81,39,356,48,88,36,067,47,67,33,187,,1*7B

\$GLGSV,2,2,07,65,25,033,46,79,17,262,47,82,08,315,43,1*46

\$GAGSV,2,1,05,03,49,122,45,15,47,342,45,34,37,056,43,27,33,273,43,7*7B

\$GAGSV,2,2,05,30,30,208,41,7*49

\$GBGSV,4,1,14,33,72,072,50,40,63,187,48,07,63,217,45,10,63,251,45,1*74

\$GBGSV,4,2,14,38,58,328,48,28,56,353,49,08,52,306,44,41,47,200,48,1*75

\$GBGSV,4,3,14,13,47,291,45,14,45,047,45,43,44,092,47,42,20,040,42,1*71

\$GBGSV,4,4,14,11,20,105,41,39,11,172,42,1*78

Table 11: GSV Data Format

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header GP=GPS/QZSS, GL=GLONSS, GA=GALILEO, GB=BEIDOU, GI=IRNSS.
Total number of messages	4		Range 1 to 9
Message number	1		Range 1 to 9
Satellites in view	15		
Satellite ID	196		Channel 1
Elevation	73	degrees	Channel 1 (Range 00 to 90)
Azimuth	108	degrees	Channel 1 (Range 000 to 359)
SNR (C/No)	46	dB-Hz	Channel 1 (Range 00 to 99, null when not tracking)
Satellite ID	199		Channel 4
Elevation	59	degrees	Channel 4 (Range 00 to 90)
Azimuth	164	degrees	Channel 4 (Range 000 to 359)
SNR (C/No)	22	dB-Hz	Channel 4 (Range 00 to 99, null when not tracking)
Signal ID	1		GPS/QZSS: L1 C/A=1 GLONASS: L1 C/A=1 GALILEO: E1=7 BEIDOU: B1=1, B1C=3
Checksum	*5B		
<CR> <LF>			End of message termination

- **RMC---Recommended Minimum Specific GNSS Data**

Contains the values for the following example:

\$GNRMC,061300.000,A,2503.71255,N,12138.74493,E,0.01,30.70,150622,,D,V*38

Table 12: RMC Data Format

Name	Example	Units	Description
Message ID	\$GNRMC		RMC protocol header
UTC Time	061300.000		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	2503.71255		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12138.74493		dddmm.mmmmm
E/W Indicator	E		E=east or W=west
Speed over ground	0.001	knots	True
Course over ground	30.70	degrees	
Date	150622		ddmmyy
Magnetic variation		degrees	
Variation sense			E=east or W=west
Mode	D		N = No position fix A = Autonomous GNSS fix D = Differential GNSS fix E = Estimated/Dead reckoning fix
Navigational status indicator	V		S = Safe C = Caution U = Unsafe V = Void
Checksum	*38		
<CR> <LF>			End of message termination

- **VTG---Course Over Ground and Ground Speed**

Contains the values for the following example:

\$GNVTG,30.70,T,,M,0.01,N,0.01,K,D*12

Table 13: VTG Data Format

Name	Example	Units	Description
Message ID	\$GPVTG		VTG protocol header
Course over ground	30.70	degrees	Measured heading
Reference	T		True

Course over ground		degrees	Measured heading
Reference	M		Magnetic
Speed over ground	0.001	knots	Measured speed
Units	N		Knots
Speed over ground	0.001	km/hr	Measured speed
Units	K		Kilometer per hour
Mode	D		N = No position fix A = Autonomous GNSS fix D = Differential GNSS fix E = Estimated/Dead reckoning fix
Checksum	*12		
<CR> <LF>			End of message termination

● GST---Estimated error in position solution

Contains the values for the following example:

\$GNGST,061300.000,2.6,1.9,1.6,169.8,1.9,1.6,6.8*71

Table 14: GST Data Format

Name	Example	Units	Description
Message ID	\$GNGST		GST protocol header
UTC Time	061300.000		hhmmss.sss
RangeRMS	2.6	meters	RMS value of the standard deviation of the ranges
stdMajor	1.9	meters	Standard deviation of semi-major axis of error ellipse
stdMinor	1.6	Meters	Standard deviation of semi-minor axis of error ellipse
Orient	169.8	degrees	Orientation of semi-major axis of error ellipse
stdLat	1.9	meters	Standard deviation of latitude error
stdLong	1.6	meters	Standard deviation of longitude error
stdAlt	6.8	meters	Standard deviation of altitude error
Checksum	*71		
<CR> <LF>			End of message termination

9. Document change list

Revision 0.1

- Draft release on Aug 23, 2024.

Revision 0.2 (September 03, 2024)

- Change the product's appearance photo.
- Change the input current from 28mA to 18mA in section 2 and 7.
- Remove the RTK content in section 8.1.

Revision 1.0 (December 19, 2024)

- Changed the velocity accuracy from 0.01 m/s CEP to 0.1 m/s CEP in section 4.1.
- Changed the hot start from 2s to < 2s in section 4.1.
- Changed the time accuracy from 10ns to ± 10 ns in section 4.1.
- Added note in section 4.1.